




◆ 特点

- 1.MZ32 系列产品分两大类：A-芯片型、B-壳装型
- 2.耐电压：120V-500V
- 3.长期稳定
- 4.无机械和电气噪音
- 5.无触点



A-芯片型

◆ 应用范围


- 1.家用电器（空调、冰箱）
- 2.电机



B-壳装型

◆ 外形尺寸（单位：mm）

◆ 型号说明

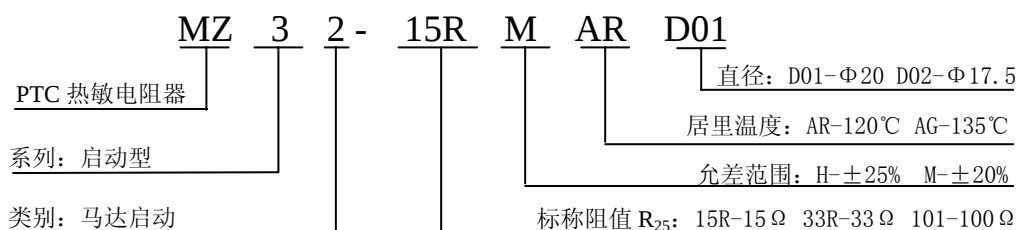

◆ 芯片型规格表

型 号	居里温度 $T_c(^{\circ}\text{C})$	额定电阻值 $R_{25}(\Omega)$	最大电压 $V_{\text{max}}(\text{V})$	最大电流 $I_{\text{max}}(\text{A})$	启动时间 $T_0(\text{s})$	恢复时间 $T_{\text{max}}(\text{s})$	功率损耗 $P_{\text{max}}(\text{W})$	恢复电阻值 $R_{\text{ref}}(\Omega)$	外形尺寸 (mm)	
									D	T
MZ32-4R7MARD01	120 ± 10 (AR)	4.7	180	12	0.3-1.2	90	3.5	10	$20.0^{+0.5}-1.0$	2.5 ± 0.2
MZ32-6R8MARD01		6.8	220	10	0.3-1.2	90	3.5	15		
MZ32-10RMARD01		10	240	10	0.2-0.8	85	3	15		
MZ32-15RMARD01		15	260	10	0.2-0.8	85	3	25		
MZ32-22RMARD01		22	300	9	0.2-0.8	85	3	25		
MZ32-33RMARD01		33	300	9	0.2-0.8	85	3	25		
MZ32-47RMARD01		47	300	9	0.2-0.8	85	3	25		
MZ32-68RMARD01		68	320	9	0.2-0.8	85	3	25		
MZ32-4R7MARD02	120 ± 10 (AR)	4.7	170	12	0.2-1.0	80	3.2	10	$17.5^{+0.5}-1.0$	2.5 ± 0.2
MZ32-6R8MARD02		6.8	220	10	0.2-1.0	80	3.2	15		
MZ32-10RMARD02		10	240	9	0.2-1.0	80	3	20		
MZ32-15RMARD02		15	260	8	0.2-1.0	80	3	20		
MZ32-22RMARD02		22	280	8	0.2-0.8	80	3	15		
MZ32-33RMARD02		33	280	7	0.2-0.8	80	3	20		
MZ32-47RMARD02		47	300	6	0.2-0.8	80	3	20		
MZ32-68RMARD02		68	300	5	0.2-0.8	80	3	20		



MZ32-4R7MAGD01	135±10 (AG)	4.7	180	12	0.3-1.2	70	3.5	10	20.0 ^{+0.5} -1.0	2.5±0.2
MZ32-6R8MAGD01		6.8	200	10	0.3-1.2	70	3.5	15		
MZ32-10RMAGD01		10	230	9	0.2-1.0	65	3.2	15		
MZ32-15RMAGD01		15	250	8	0.2-1.0	65	3.2	15		
MZ32-22RMAGD01		22	300	7	0.2-1.0	65	3.2	20		
MZ32-33RMAGD01		33	360	6	0.2-1.0	65	3.2	25		
MZ32-47RMAGD01		47	400	5	0.2-1.0	65	3.2	35		
MZ32-68RMAGD01		68	430	4	0.2-1.0	65	3.2	55		
MZ32-4R7MAGD02	135±10 (AG)	4.7	180	10	0.3-1.0	65	3.4	15	17.5 ^{+0.5} -1.0	2.5±0.2
MZ32-6R8MAGD02		6.8	200	9	0.3-1.0	65	3.4	15		
MZ32-10RMAGD02		10	220	8	0.3-1.0	65	3.2	20		
MZ32-15RMAGD02		15	240	7	0.2-0.8	65	3.2	20		
MZ32-22RMAGD02		22	280	6	0.2-0.8	65	3.2	25		
MZ32-33RMAGD02		33	320	4	0.2-0.8	65	3.2	45		
MZ32-47RMAGD02		47	350	4	0.2-0.8	65	3.2	45		
MZ32-68RMAGD02		68	400	4	0.2-0.8	65	3.2	45		