



Miniature Potentiometers

VO9LPVN

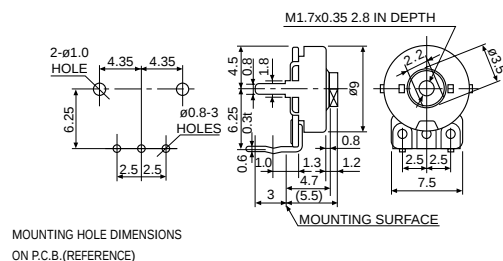

MOUNTING HOLE DIMENSIONS
ON P.C.B.(REFERENCE)

V105-4PVN

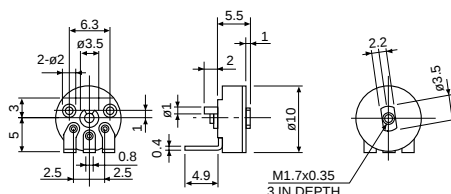

SPECIFICATIONS

Total Rotational Angle	230±5°
Rotational Torque	1-10mN·m {10-102gf·cm}
Resistance Range	1kΩ - 500kΩ (taper B) 5kΩ - 250kΩ (other taper)
Rated Power	0.05W (taper B) 0.025W (other taper)
Maximum Rated Voltage	AC10V, DC10V


SPECIFICATIONS

Total Rotational Angle	200±10°
Rotational Torque	2-15mN·m {20-153gf·cm}
Resistance Range	1kΩ - 500kΩ (taper B) 1kΩ - 500kΩ (other taper)
Rated Power	0.07W (taper B) 0.03W (other taper)
Maximum Rated Voltage	AC100V, DC100V (taper B) AC70V, DC70V (other taper)



XVB93 Series

XVB93PHPN



Single-Element

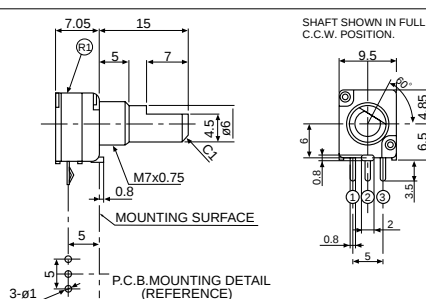**XVB93S (C97ST)**


With Rotary Switch

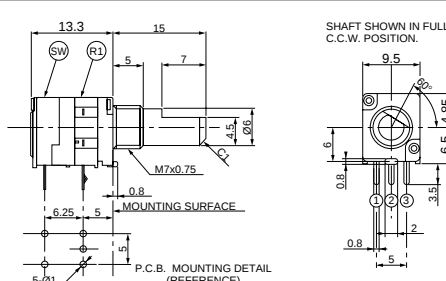**XVB93S (D98SG)**

(With Push-Momentary Switch)

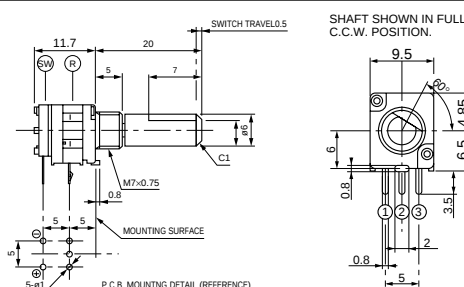

XVB93M1N

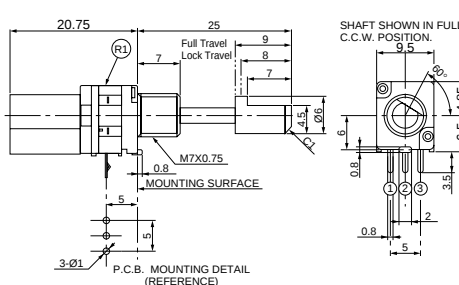


SPECIFICATIONS

Total Rotational Angle	300±5°
Rotational Torque	Single Shaft Type : 2 to 15 mN·m
Nominal Total Resistance	20kΩ, 50kΩ, 100kΩ
Resistance Tolerance	Within±20% of the nominal total resistance
Resistance Taper	1B, 3B, 15A
Rated Power	0.05W
Maximum Rated Voltage	AC50V, DC10V

Switch Rating: DC16V 3A
(SPST)

Switch Rating: DC12V 0.5A
(SPST)

Push-Lock mechanism



● Specifications in this catalog are presented basically for informative purposes. We request the exchange of official approval drawings before placing order.