


单边盘头机螺钉



- 材料
不锈钢 A2
不锈钢 A2 表面发黑
不锈钢 A2 耐落加工

- 安装时可使用普通的一字螺丝刀、解除使用专用工具。
- 头部没有凹槽、尘土不能附着，适合于室外使用。
- 匹配于英制的机螺栓。

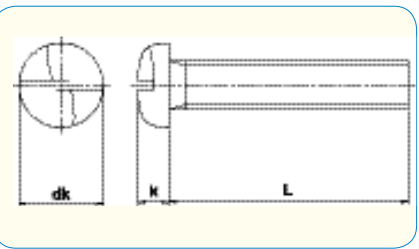

遵从 RoHS 指示

	M3	M4	M5	M6
dk	5.5	7	9	10.5
k	2	2.6	3.3	3.9
拆卸工具 #	410	410	510	610


规格		零件号 #			每箱数量
d	L	不锈钢 A2	不锈钢表面发黑	耐落加工	
M3	5	OW010305	OW010305BK	OW010305NY	100
	6	OW010306	OW010306BK	OW010306NY	100
	8	OW010308	OW010308BK	OW010308NY	100
	10	OW010310	OW010310BK	OW010310NY	100
	12	OW010312	OW010312BK	OW010312NY	100
	16	OW010316	OW010316BK	OW010316NY	100
M4	6	OW010406	OW010406BK	OW010406NY	100
	8	OW010408	OW010408BK	OW010408NY	100
	10	OW010410	OW010410BK	OW010410NY	100
	12	OW010412	OW010412BK	OW010412NY	100
	16	OW010416	OW010416BK	OW010416NY	100
	20	OW010420	OW010420BK	OW010420NY	100
	25	OW010425	OW010425BK	OW010425NY	100

规格		零件号 #			每箱数量
d	L	不锈钢 A2	不锈钢表面发黑	耐落加工	
M5	8	OW010508	OW010508BK	OW010508NY	100
	10	OW010510	OW010510BK	OW010510NY	100
	12	OW010512	OW010512BK	OW010512NY	100
	16	OW010516	OW010516BK	OW010516NY	100
	20	OW010520	OW010520BK	OW010520NY	100
	25	OW010525	OW010525BK	OW010525NY	100
M6	30	OW010530	OW010530BK	OW010530NY	100
	40	OW010540	OW010540BK	OW010540NY	100
	8	OW010608	OW010608BK	OW010608NY	100
	10	OW010610	OW010610BK	OW010610NY	100
	12	OW010612	OW010612BK	OW010612NY	100
	16	OW010616	OW010616BK	OW010616NY	100
	20	OW010620	OW010620BK	OW010620NY	100
	25	OW010625	OW010625BK	OW010625NY	100
	30	OW010630	OW010630BK	OW010630NY	100
	40	OW010640	OW010640BK	OW010640NY	100

销售数量从 1 支开始，详细情况请联络我们。
产品编号末尾 [BK] = 表面发黑, [NY] = 耐落加工

单边螺丝刀

- 解除单边螺栓的专用工具。
- 使用专用工具以外的工具解除非常困难。

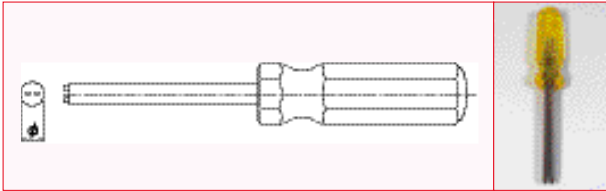

规格	零件号 #	每箱数量	φ	备注
410	OW410	1	φ 8	M3/M4/3.5/4.2
510	OW510	1	φ 10	M5/4.2/4.8
610	OW610	1	φ 12	M6

- 锁紧螺栓
Nyllok® 耐落加工®
- 强大的锁紧功能
 - 可重复使用
 - 耐汽油、油、黄油、化学洗涤剂
 - 轻且生锈
 - 使用性出类拔萃