




Cement-Filled Fixed Resistors


RGG



RGB-L





RGB-PS RGB-PW





RGB-HS, HV


With Bracket

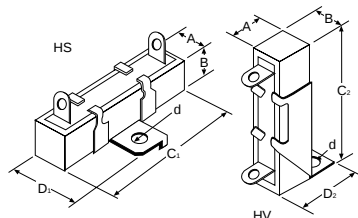


RGC



RGH

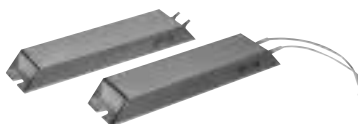

S-style
sideways
mountable



Model	Rated Power (W)	Resistance Range (Ω)	Dimensions (mm)				
			A	B	C	F	Ød
RGG2	2	0.22-270	11	7	21	5	0.8
RGG3	3	0.27-680	12	8	26	5	0.8
RGG5	5	0.27-680	13	9	26	5	0.8
RGG7	7	0.68-1,200	13	9	38.5	7.5	1.0
RGG10	10	1-1,800	16	13	35	7.5	1.0
RGG20	20	1.5-2,700	20	13	45	7.5	-

The RGG 20 terminal forms differ so consult us for further details.

Model	Rated Power (W)	Resistance Range (Ω)	Dimensions (mm)		
			A/B	C	Ød
RGB2	2	0.22-270	6.3	18	0.8
RGB3	3	0.27-680	8	23	0.8
RGB5	5	0.27-680	9.5	23	0.8
RGB7	7	0.68-1,200	9.5	36	0.8
RGB10	10	1-1,800	9.5	48	0.8
RGB15	15	1.2-2,200	13	48	1.0
RGB20	20	1.5-2,700	13	63.5	1.0

Model	Rated Power (W)	Resistance Range (Ω)	Dimensions (mm)			
			A/B	C	E	F
RGB5PS	5	0.27-680	9.5	28	10	15
RGB7PS	7	0.68-1,200	9.5	36	10	22.5
RGB10PS	10	1-1,800	9.5	48	10	35
RGB15PS	15	1.2-2,200	13	48	15	33
RGB20PS	20	1.5-2,700	13	63.5	15	49
RGB5PW	5	0.27-680	9.5	28	22	15
RGB7PW	7	0.68-1,200	9.5	36	22	22.5
RGB10PW	10	1-1,800	9.5	48	22	35
RGB15PW	15	1.2-2,200	13	48	30	33
RGB20PW	20	1.5-2,700	13	63.5	30	49

Model	Rated Power (W)	Resistance Range (Ω)	Dimensions (mm)					
			A/B	C ₁	C ₂	D ₁	D ₂	φd
RGB10H	10	1-1,800	9.5	48	48	25	23.5	4
RGB15H	15	1.2-2,200	13	48	57	28.5	27	4
RGB20H	20	1.5-2,700	13	63.5	63.5	28.5	27	4
RGB30H	30	1.8-3,300	19	75	83	38	36	4.2
RGB40H	40	2.2-4,700	19	90	90	38	36	4.2

HS is equipped with a horizontal mounting bracket, and HV with a vertical mounting bracket.

Model	Rated Power (W)	Resistance Range (Ω)	Dimensions (mm)						Element count
			A	B	C	E	F		
RGC2	2	0.1-1	5	9	14	13	9	Single	
RGC3	3	0.1-1	5	13	14	13	9		
RGC5	5	0.1-1	5	17	14	13	9		
RGC22	2+2	0.1-1	5	9	26	13	18	Twin	
RGC33	3+3	0.1-1	5	13	26	13	18		
RGC55	5+5	0.1-1	5	17	26	13	18		
RGC771	7+7	0.1-0.39	5	20	26	13	18		

Twin-type has two elements at very close resistance values and the same TCR, and is best suited for the final-stage emitters resistor of a stereo power amplifier.

Model	Rated Power	L ₁	L ₂	W	H	D
RGH 60	60W	115	100	40	20	5.3
RGH 80	80W	140	125	40	20	5.3
RGH 100	100W	165	150	40	20	5.3
RGH 120	120W	190	175	40	20	5.3
RGH 150	150W	215	200	40	20	5.3
RGH 200	200W	215	200	50	25	5.3
RGH 250	250W	240	225	50	25	5.3
RGH 300	300W	215	200	60	30	5.3
RGH 400	400W	265	250	60	30	5.3
RGH 500	500W	335	320	60	30	5.3
RGH1000	1000W	400	385	100	50	5.3
RGH1500	1500W	450	435	120	60	5.3

The RGH1000 and RGH1500 have 4 installation grooves.